


WEIGHT -- 14 OUNCES

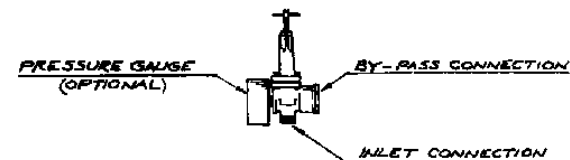

DIAPH. PRESS. RELIEF VALVE NO.	INLET CONNECTION	BY-PASS CONNECTION	GAUGE CONNECTION	RECOMMENDED PRESS. RANGE
8460-1/2-50	1/2" N.P.T. (M)	1/2" N.P.T. (F)	1/2" N.P.T. (F)	UP TO 50 P.S.I.
8460-3/4-50	3/4" N.P.T. (M)	3/4" N.P.T. (F)	1/2" N.P.T. (F)	UP TO 50 P.S.I.
8460-1/2	1/2" N.P.T. (M)	1/2" N.P.T. (F)	1/2" N.P.T. (F)	UP TO 300 P.S.I.
8460-3/4	3/4" N.P.T. (M)	3/4" N.P.T. (F)	1/2" N.P.T. (F)	UP TO 300 P.S.I.

- TO MAINTAIN SELECTED PRESSURE FOR UNIFORM SPRAY BOOM OR BROADCAST SPRAYING.
- SUPERIOR DIAPHRAGM TYPE DESIGN FOR RESPONSIVE, CHATTER-FREE, PRESSURE CONTROL.
- PARTS TOUCHED BY CHEMICALS MADE OF NYLON OR STAINLESS STEEL -- WITH DIAPHRAGM OF SPECIAL CORROSION RESISTANCE.
- MAXIMUM CORROSION RESISTANCE TO ALL FARM CHEMICALS AND FERTILIZER SOLUTIONS.
- PRESSURE SETTING LOCKS IN POSITION.
- CONTROL PARTS ARE SEALED FROM LIQUID CONTACT.
- STAINLESS STEEL VALVE LINER.

#### NOTE

CAN BE USED WITH TEE VALVE -- SEE BULLETIN #158.  
CAN BE USED WITH DIRECTO VALVE -- SEE BULLETIN #100.

FOR COMPLETE INFORMATION ON #8460 - DIAPHRAGM PRESSURE RELIEF VALVE, SEE BULLETIN NO. 191.

#### DESCRIPTION:

NO. 8460-1/2- & NO. 8460-3/4  
DIAPHRAGM PRESSURE  
RELIEF VALVE



**Spraying Systems Co.®**

Spray Nozzles and Accessories  
P.O. Box 7900 - Wheaton, IL 60189-7900

Rev. No. 1

Ref.

Data Sheet No.

**8460**

SHEET OF